

BT ROOF

Centrifugal roof fan


Centrifugal roof fan suitable for air renewal in bathrooms or small premises with stuffy or smelly environments. Steel sheet set with epoxy powder finishing coat. Roof base support and bird protection grid included. Maximum air working temperature of 50°C.



SINGLE PHASE RANGE

Code	Model	R.P.M. max.	Max. Current (A) 230	O. P. Kw	Air Flow m ³ /h	Sound dB (A)*	Weight Kg.
300740800	BT ROOF 150	2400	0,35	0,07	450	42	5,6
300740900	BT ROOF 250	2550	0,81	0,182	1.180	50	8,8

* Average sound pressure level (SPL), inlet side, measured in open field from a distance of 3 times the impeller diameter with a minimum of 1,5m.

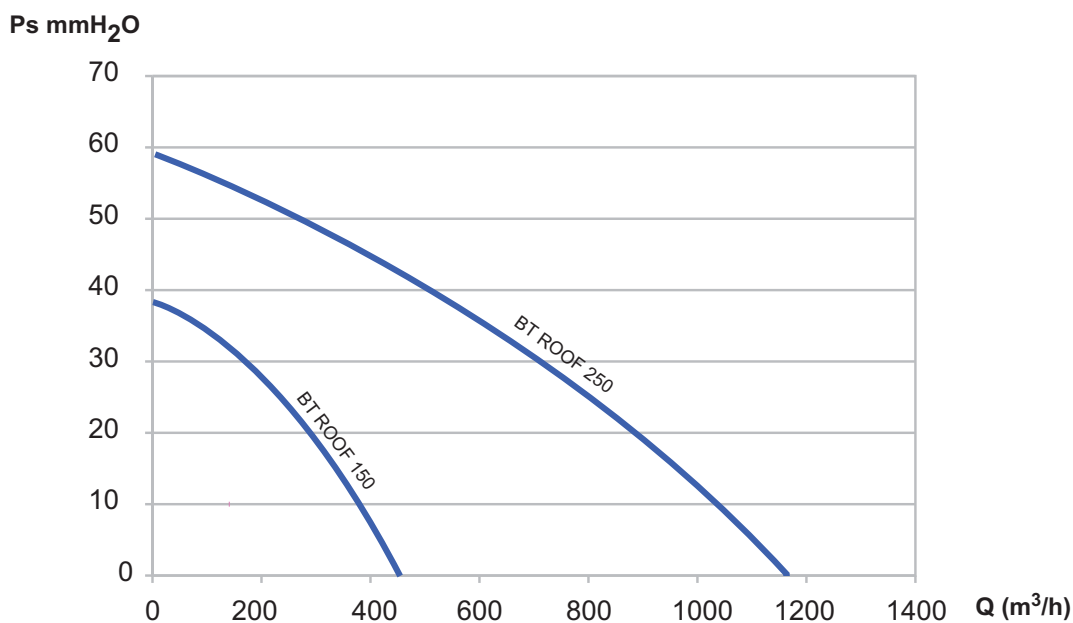

BT ROOF

Centrifugal roof fan

DIMENSIONS (mm)

Model	ØA	B	ØC	D	E	F	G	H	I	ØJ
BT ROOF 150	400	239	148	72	17	38	201	340	300	9
BT ROOF 250	484	350	248	79	30	38	264	400	360	9

