

NEW



3,5" full colour touch-screen graphic display control panel, multifunctional, to control the decentralised ventilation system consisting of ORION 100 and 150 units.

Can control up to 8 units via Modbus.

Power supply: 24 Vac 50/60Hz with maximum load 4VA or 12÷30VDC with maximum load 2W.

Operating temperature: -10°C +55°C.

IP30 degree of protection.

RS-485 Modbus communication port.


Maximum length of connection cables: power supply 10m, RS-485 port 1000m.

Operating humidity: 5 to 95% relative humidity without condensation.

Compliance: RoHS 2011/65/EC, WEEE 2012/19/EU, REACH Regulation (EC) No. 1907/2006, EMC 2014/30/EU, RED 2014/53/EU.

System functionality:

- Speed setting
- Manual boost activation
- Synchronisation of wired units
- Night mode
- Free cooling
- Comfort/efficiency selection
- Humidity probe activation/deactivation
- Filter reset

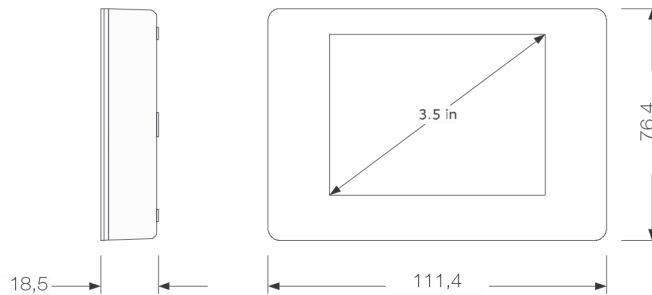

Dimensioni in mm